


RoomSense

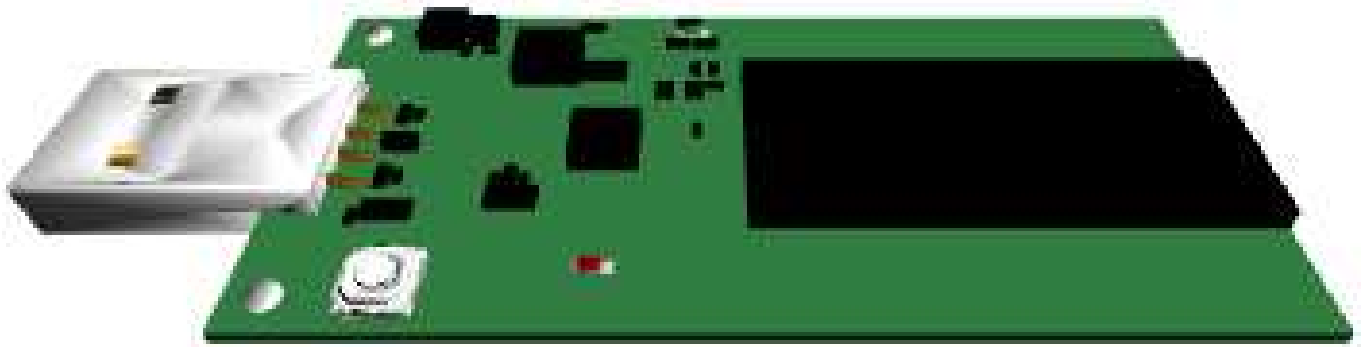

This board was designed and built by Geppetto

Free automated documentation anytime.
Design for free @ <https://geppetto.gumstix.com/>

No Minimum Order

Automated Supply Chain

Reduce Cost and Errors




geppetto
by gumstix™

Thanks for using Geppetto to design this board!

One Stop Design-to-Order

Simply place displays, sensors, processors, and Geppetto connects it all.
No routing needed.

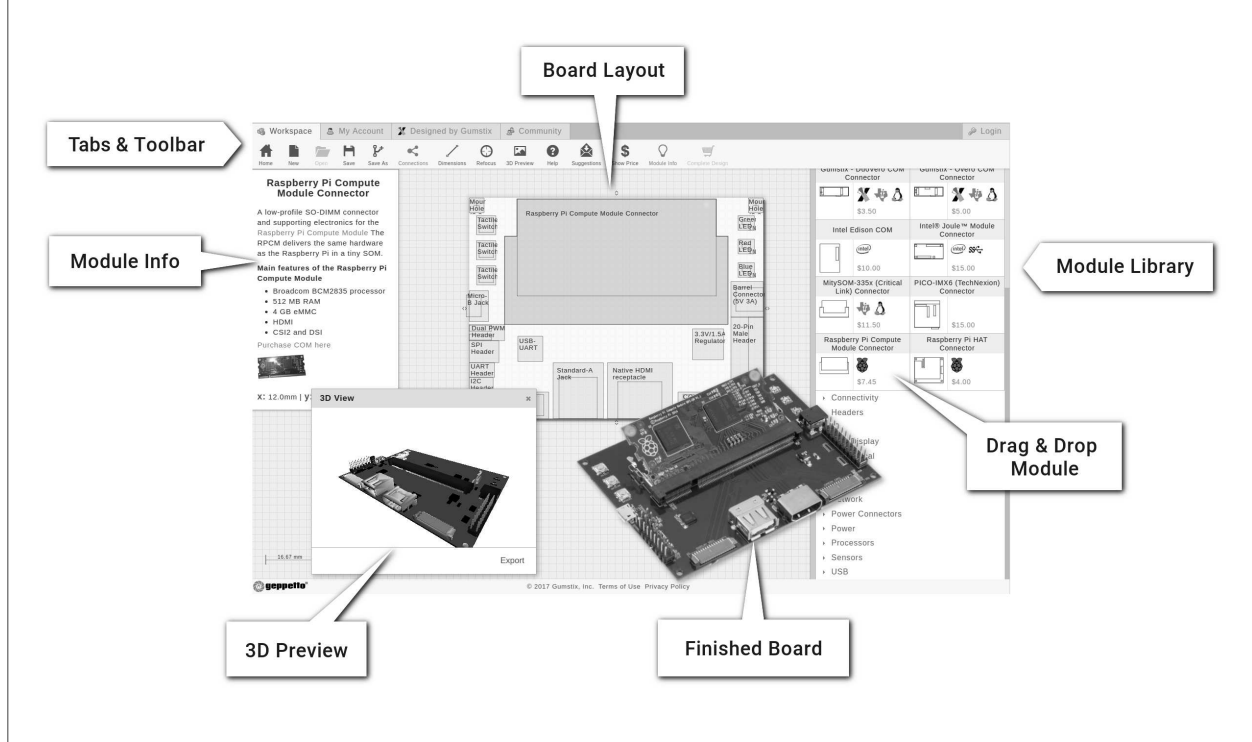

Gumstix, Inc. shall have no liability of any kind, express or implied, arising out of the use of the Information in this document, including direct, indirect, special or consequential damages.

Gumstix, Inc. may have patents, patent applications, trademarks, copyrights, trade secrets or other intellectual property rights pertaining to Gumstix products described in this document (collectively "Gumstix Intellectual Property").

Except as expressly provided in any written license or agreement from Gumstix, Inc., this document and the information contained therein does not create any license to Gumstix's Intellectual Property.

The Information contained herein is subject to change without notice. Revisions may be issued regarding changes and/or additions.

Copyright © 2018, Gumstix, Inc. All rights reserved.

Built in Geppetto
No engineering required.
Delivered in 15 days.




Board Description

Occupancy and Air Sensor


Board Dimensions

6.5cm x 3cm

Geppetto Makes Hardware Easy

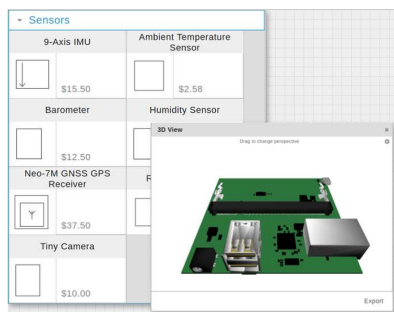

Custom Library and
3D Design Preview

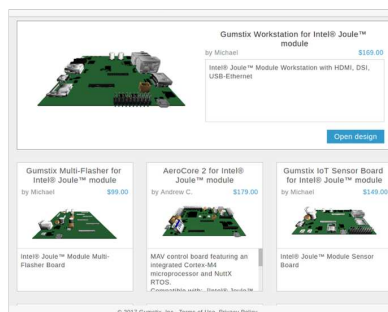

Design and Save
Your Work Online



Free Automated
Documentation on Demand


Start your next design at geppetto.gumstix.com

Built in Geppetto
No engineering required.
Delivered in 15 days.

Contents

1	Modules on Board	1
1.1	Processors	1
1.1.1	ATSAMW25 M0+WiFi (v2) (1)	1
1.2	USB	2
1.2.1	Standard-A Plug (v7) (2)	2
1.3	Power	2
1.3.1	3.3V/1.5A Regulator (v14) (3)	2
1.4	Sensors	2
1.4.1	Humidity Sensor (v5) (4)	2
1.4.2	Passive Infrared (PiR) - Motion Sensor (v2) (5)	3
1.4.3	Barometer (v9) (6)	3
1.5	Lights and Switches	3
1.5.1	Top-side LED (v5) (7)	3
1.5.2	Tactile Switch (v18) (8)	3
2	Module Connections Graph	4
3	Module Power Graph	5

1 Modules on Board

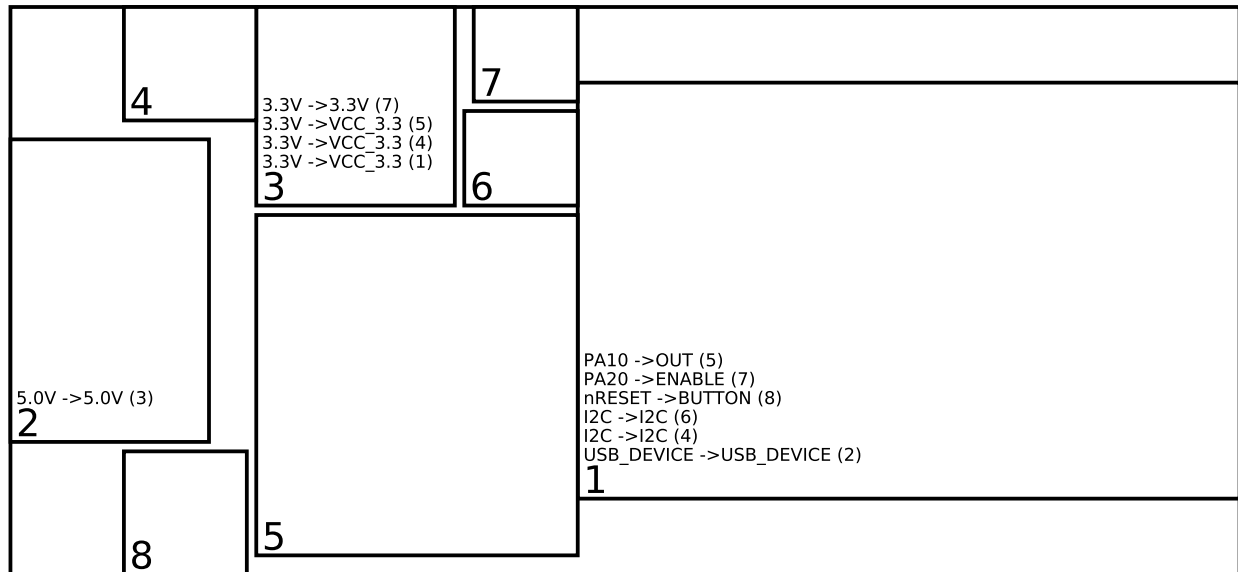

1.1 Processors

1.1.1 ATSAMW25 M0+WiFi (v2) (1)

The Atmel SMART SAMW25 module is based on the industry leading low-power 2.4GHz IEEE 802.11 b/g/n Wi-Fi ATWINC1500 SoC (System on Chip) combined with the ARM Cortex-M0+ based microcontroller technology from Atmel.

Datasheet available at:

http://ww1.microchip.com/downloads/en/DeviceDoc/Atmel-42395-SmartConnect-ATSAMW25-MR210PA_Datasheet.pdf

Requires:

- VCC_3.3 from 3.3V/1.5A Regulator (3)

Provides:

- USB_DEVICE to Standard-A Plug (2)
- I2C to:
 - Humidity Sensor (4)
 - Barometer (6)
- VLOGIC to:
 - Humidity Sensor (4)
 - Barometer (6)
 - Tactile Switch (8)

- Passive Infrared (PiR) - Motion Sensor (5)
- nRESET to Tactile Switch (8)
- PA20 to Top-side LED (7)
- PA10 to Passive Infrared (PiR) - Motion Sensor (5)

1.2 USB

1.2.1 Standard-A Plug (v7) (2)

A standard-A USB plug allows your board to be connected as a device to an external host. It can also be used to power the board off the 5V power drawn from the USB host.

The module exposes USB_DEVICE on ATSAMW25 M0+WiFi (1).

It supplies 5.0V to:

- 3.3V/1.5A Regulator (3)

1.3 Power

1.3.1 3.3V/1.5A Regulator (v14) (3)

This DC to DC step down regulator provides a 3.3V DC output at 1.5A needed by certain components on this board. It is capable of accepting an input voltage between 3.1 to 16V DC and output is controlled by the TI TPS6211 buck regulator.

It receives 5.0V from Standard-A Plug (2).

The dataheet for the TPS6211 regulator is available at:

<http://www.ti.com/lit/ds/symlink/tps62110.pdf>

This regulator provides 3.3V to:

- ATSAMW25 M0+WiFi (1)
- Humidity Sensor (4)
- Passive Infrared (PiR) - Motion Sensor (5)
- Top-side LED (7)

1.4 Sensors

1.4.1 Humidity Sensor (v5) (4)

The humidity sensor module uses the Silicon Labs Si7021-A20 humidity and temperature sensor to measure ambient humidity. The module communicates with host devices serially over I²C.

The Si7021-A20 sensor's datasheet is available at:

<https://www.silabs.com/Support%20Documents%2FTechnicalDocs%2FSi7021-A20.pdf>

Highlights

Maximum resolution	0.025	5°RH
Maximum temp. resolution	0.01	°C
I ² C slave address		0x40

Connections

The humidity sensor module is connected to I2C on ATSAMW25 M0+WiFi (1).

1.4.2 Passive Infrared (PIR) - Motion Sensor (v2) (5)

This module uses the Murata IRS-B210ST01-R1 sensor with the ON Semiconductor NCS36000 Passive Infrared (PIR) Detector Controller.

This sensor output is connected via GPIO to ATSAMW25 M0+WiFi (1).

1.4.3 Barometer (v9) (6)

The barometer module is an ultra-compact, low-power barometric pressure sensor useful for aerial vehicles. The module's MS5611-01BA03 Barometric Pressure Sensor offers a high resolution reading, accurate to within 10 cm and is optimized for altimeter and variometer applications. It can communicate serially either over I²C or SPI buses. *At altitudes close to sea level, covering the barometer module with a light piece of foam may help to improve the accuracy of readings.*

Highlights

Max resolution:	0.065	mbar
Range:	10 – 1200	mbar
Min response time:	0.5	ms
I ² C slave addr:		0x76

Connections

This module is connected to I2C on ATSAMW25 M0+WiFi (1).

Visit <http://www.meas-spec.com/downloads/MS5611-01BA03.pdf> for details.

1.5 Lights and Switches

1.5.1 Top-side LED (v5) (7)

The top-side LED module contains a 1608 standard size LED of a user-selected color, mounted on the top side of a Geppetto board.

The LED is active-high on PA20 from ATSAMW25 M0+WiFi (1).

1.5.2 Tactile Switch (v18) (8)

This 4.9 sq. mm pull-down touch switch provides a user input for the signal nRESET on ATSAMW25 M0+WiFi (1).

2 Module Connections Graph

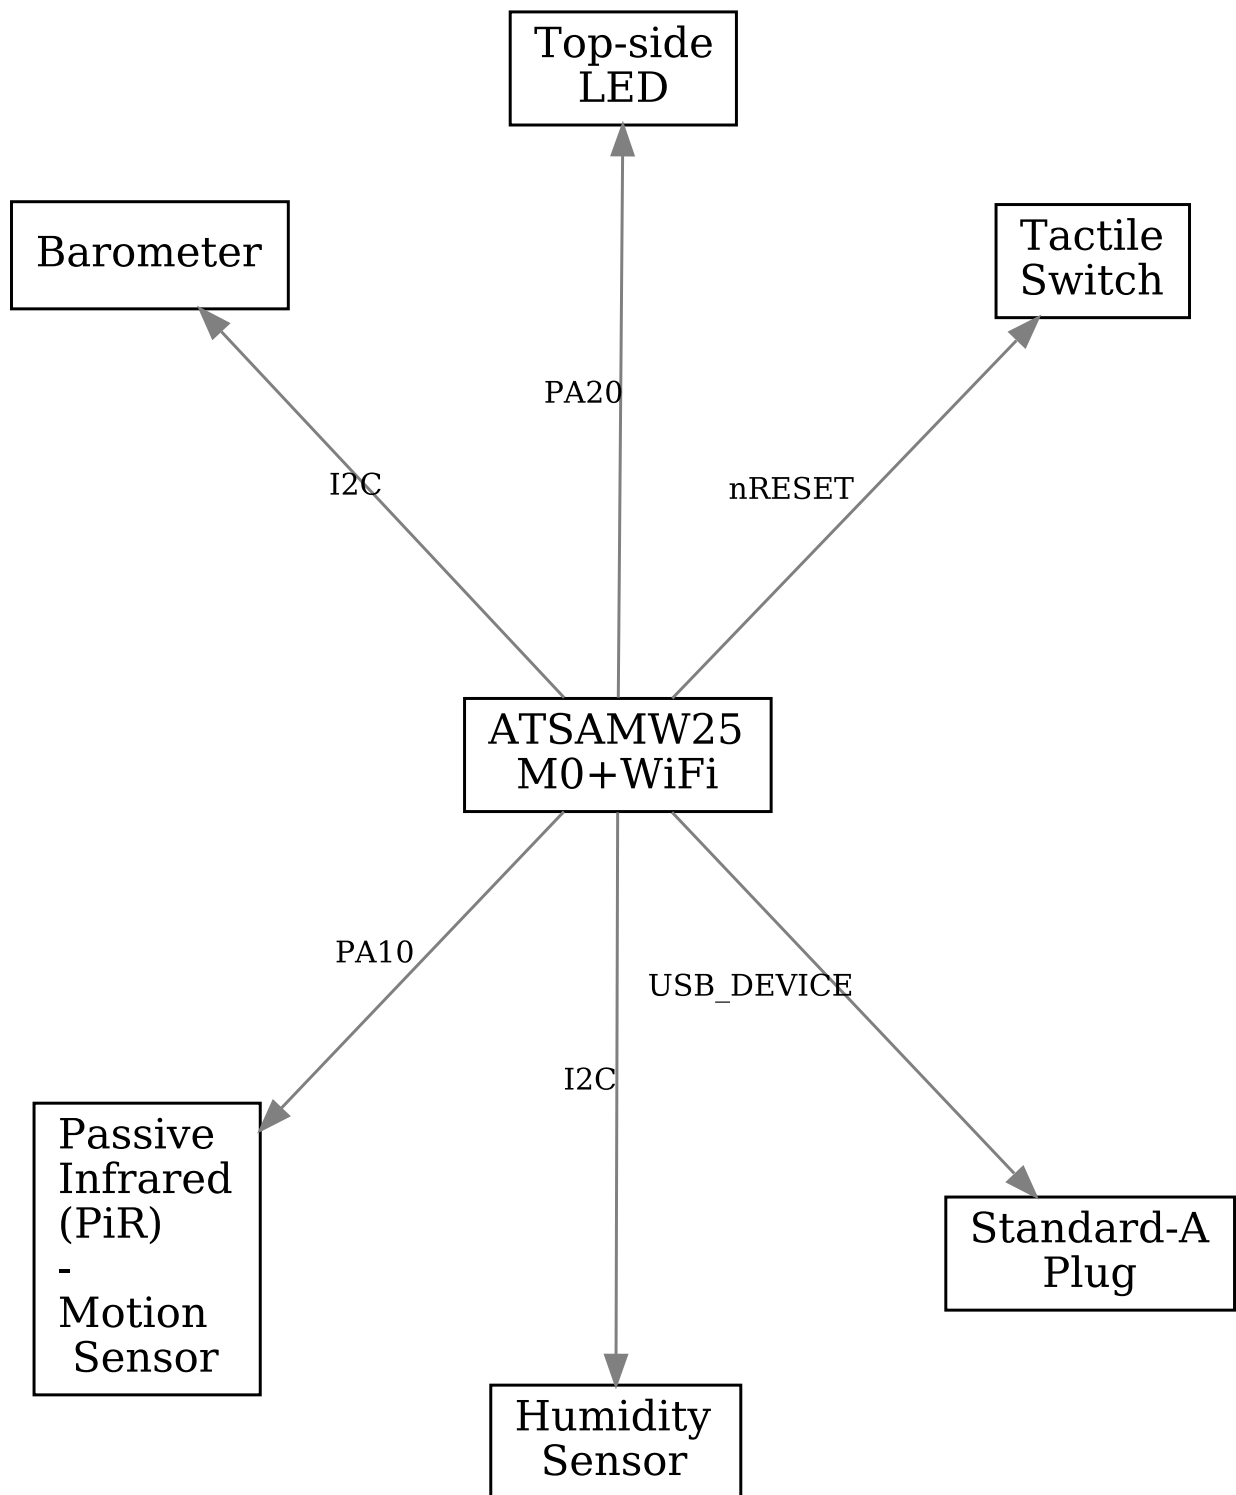


Figure 1: excludes power modules

3 Module Power Graph

